


**Al**  
2

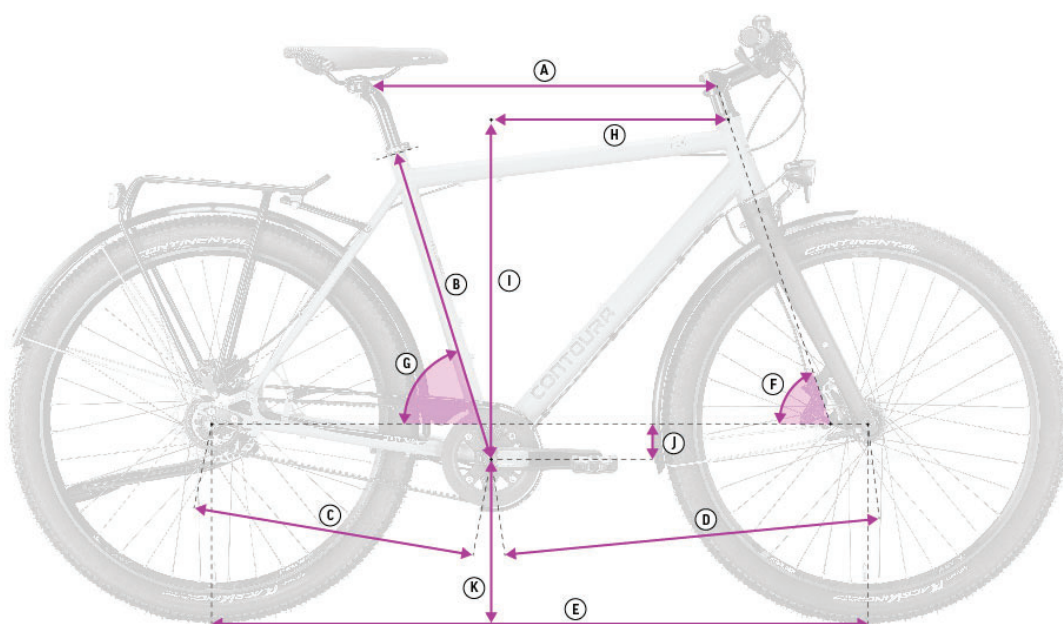

Al 2	Diamant	Rahmenhöhe (cm)			
		50	54	58	62
A	Oberrohrlänge (mm)	538	575	594	608
B	Sitzrohrlänge (mm)	500	540	580	620
C	Kettenstrebenlänge (mm)	470	470	470	470
D	Front Center (mm)	635	644	658	663
E	Radstand (mm)	1094	1103	1117	1122
F	Steuerrohrwinkel (Grad)	70°	71°	71°	71,5°
G	Sitzwinkel (Grad)	72,5°	72,5°	72,5°	72,5°
H	Reach (mm)	385	400	414	418
I	Stack (mm)	620	633	633	655
J	Tretlagerabsenkung (mm)	78	78	78	78
K	Tretlagerhöhe (mm)	282	282	282	282
	Einstiegshöhe (mm)	729	767	804	841

Al 2	Trapez	Rahmenhöhe (cm)			
		45	49	53	57
A	Oberrohrlänge (mm)	542	545	570	585
B	Sitzrohrlänge (mm)	450	490	530	570
C	Kettenstrebenlänge (mm)	470	470	470	470
D	Front Center (mm)	630	635	640	650
E	Radstand (mm)	1089	1094	1099	1109
F	Steuerrohrwinkel (Grad)	70°	70°	71°	71°
G	Sitzwinkel (Grad)	73,5°	73,5°	72,5°	72,5°
H	Reach (mm)	380	385	396	406
I	Stack (mm)	620	620	633	633
J	Tretlagerabsenkung (mm)	78	78	78	78
K	Tretlagerhöhe (mm)	282	282	282	282
	Einstiegshöhe (mm)	528	528	527	527

Al 2	Curve	Rahmenhöhe (cm)			
		45	48	52	56
A	Oberrohrlänge (mm)	548	548	564	578
B	Sitzrohrlänge (mm)	450	480	520	560
C	Kettenstrebenlänge (mm)	470	470	470	470
D	Front Center (mm)	630	630	635	645
E	Radstand (mm)	1091	1091	1096	1106
F	Steuerrohrwinkel (Grad)	70°	70°	71°	71°
G	Sitzwinkel (Grad)	72,5°	72,5°	72,5°	72,5°
H	Reach (mm)	381	381	392	402
I	Stack (mm)	612	612	626	626
J	Tretlagerabsenkung (mm)	70	70	70	70
K	Tretlagerhöhe (mm)	290	290	290	290
	Einstiegshöhe (mm)	471	471	471	471

**CONTOURA**