


**Al**  
5

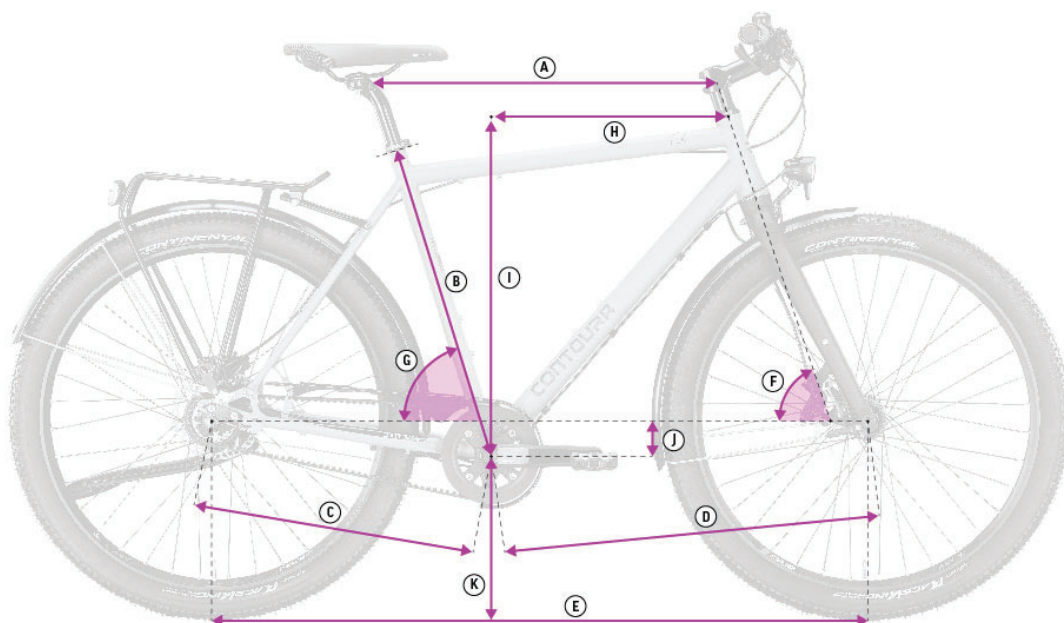

Al 5	Diamant	Rahmenhöhe (cm)				
		50	53	56	59	62
A	Oberrohrlänge (mm)	542	561	581	593	626
B	Sitzrohrlänge (mm)	500	530	560	590	620
C	Kettenstrebenlänge (mm)	455	455	455	455	455
D	Front Center (mm)	630	636	636	647	656
E	Radstand (mm)	1076	1082	1082	1093	1102
F	Steuerrohrwinkel (Grad)	70°	71°	72°	72°	72,5°
G	Sitzwinkel (Grad)	73,5°	73°	72,5°	72,5°	72,5°
H	Reach (mm)	381	393	403	408	419
I	Stack (mm)	612	625	630	649	660
J	Tretlagerabsenkung (mm)	70	70	70	70	70
K	Tretlagerhöhe (mm)	290	290	290	290	290
	Einstiegshöhe (mm)	782	799	839	927	951

Al 5	Trapez	Rahmenhöhe (cm)		
		48	52	56
A	Oberrohrlänge (mm)	549	564	578
B	Sitzrohrlänge (mm)	480	520	560
C	Kettenstrebenlänge (mm)	470	470	470
D	Front Center (mm)	630	635	645
E	Radstand (mm)	1091	1096	1106
F	Steuerrohrwinkel (Grad)	70°	71°	71°
G	Sitzwinkel (Grad)	72,5°	72,5°	72,5°
H	Reach (mm)	381	392	402
I	Stack (mm)	612	625	625
J	Tretlagerabsenkung (mm)	70	70	70
K	Tretlagerhöhe (mm)	290	290	290
	Einstiegshöhe (mm)	535	535	535

Al 5	Curve	Rahmenhöhe (cm)				
		50	53	56	59	62
A	Oberrohrlänge (mm)	542	561	581	593	626
B	Sitzrohrlänge (mm)	500	530	560	590	620
C	Kettenstrebenlänge (mm)	455	455	455	455	455
D	Front Center (mm)	630	636	636	647	656
E	Radstand (mm)	1076	1082	1082	1093	1102
F	Steuerrohrwinkel (Grad)	70°	71°	72°	72°	72,5°
G	Sitzwinkel (Grad)	73,5°	73°	72,5°	72,5°	72,5°
H	Reach (mm)	381	393	403	408	419
I	Stack (mm)	612	625	630	649	660
J	Tretlagerabsenkung (mm)	70	70	70	70	70
K	Tretlagerhöhe (mm)	290	290	290	290	290
	Einstiegshöhe (mm)	782	799	839	927	951

**CONTOURA**